



URP-300-I USB2.0 Bus Power 30 m Active Isolator Cable

URP-301-I USB2.0 Self Power 30 m Active Isolator Cable

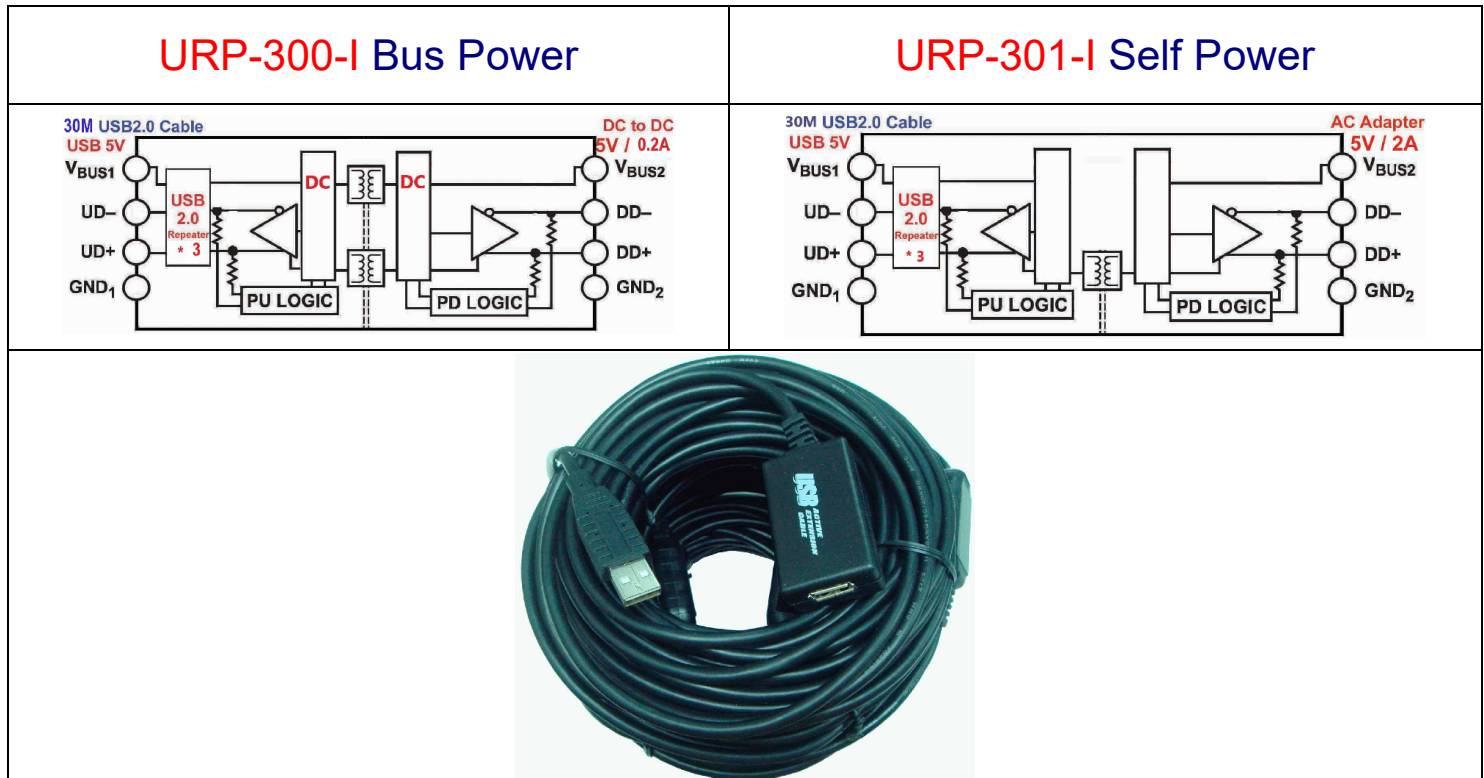

Features & Specification: Use IC => 

- Low/Full/High Speed USB (480M) Digital Isolator Chipset **ADuM4165** Install. 
- USB2.0 30M **Isolator & Active** cable
- One standard USB port (4-pin) and has the symbol
- With LED indicated working
- Windows 98,98se, xp, 2000,Vista,7,8,10,11 Support
- Support Mac 8.6 up for USB1.1 /2.0 High Speed USB (480M)
- Plug & Play
- **URP-100-I** Bus power mode / Support **Isolator 5V/0.2A Power**
- **URP-101-I** Self power mode / Support **Isolator 5V/2.0A Power**
- Support OHCI & EHCI mode
- Compliant with USB specification 1.1 , 2.0
- USB A/M TO USB A/F
- USB2.0 Stander **20# / 28#** USB Cable
- Temperature Range: -40°C to +85°C
- Weight : URP-300(301)-I 1,410g
- **Bus Power ESD protection on Tout pins (+-8KV: contact discharge +15KV: air gap discharge) Isolator: Up 1.5KV / 3KV**
- **Self Power ESD protection on Tout pins (+-8KV: contact discharge +15KV: air gap discharge) Isolator: Up 5KV**
- **URP-301-I Extra power plug : Inner (+)1.35mm / Outer (-) :3.5mm**
- **URP-301-I Plug length (metal part): 10mm+-0.3mm**