

ASM-620-BT (ASM-620 / AUM-620 Booster - w/RS-422 Driver *8)

The ASM-620-BT is a Booster of ASM (AUM)-620 throw 4000 Feet (Max) RJ-45 Cable to TX & RX extender box. The ASM-620-BT connect TX-RX Box distance extend 8000 feet (2.4km)

The ASM-620-BT with TXD+/TXD-; RXD+/RXD-; CTSD+/CTSD-; RTSD+/RTSD- Singles driver *8.

The ASM-620-BT with TXD; RXD; CTS; RTS- Single's booster.

You can easy connect TX & RX of ASM-620 / AUM-620 and connect to PC & Device of RS-232 port.

With TXD-RXD LED Display data transfer

Power: TX/RX w/ DC5V Adapter / Data rate: Over 115,200 bps / 2,400m

ESD Protection for RS-232 I/O' +-15KV




ASM-620-BT Application:



Note:

Use Cat 6 Shielded Ethernet CAT6STP Cable with preferably signal protect. =====>

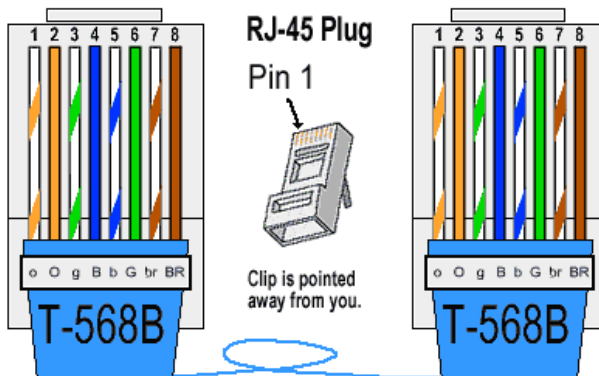

RJ45 Singles: 1. RTS+ ;2.RTS- ;3.RX+ ;4.TX- ;5.TX+ ;6.RX- ;7.CTS+ ;8.CTS-