

USB to RJ-45 (RS-232) for RS-232 DB9-M Cable


1. USB to RS-232 (RJ-45) Cable / With FTDI Chipset. With RJ-45 to DB-9-M cable
2. The FT231X is a USB to serial UART interface.
3. Power free / Bus powered. Easy to install , Plug & Play
4. Fully compliant with USB Spec2.0. Compliant USB Spec1.1.
5. Driver support: Win-XP, Win7/8/10/11, Win-CE, MAC OS.-X ,Linux, Android
6. USB 15cm Cable to RJ-45 & RJ-45 to DB-9-M cable
7. **Extender distance over 50M (RJ-45 Cable)**
8. Data rate: Over 921kbps. ESD Protection for RS-232 I/O' +-15KV
9. When updating drivers, please refer to <http://www.ftdichip.com/FTDrivers.htm> , Standard USB to DB-9-M DTE Interface

Housing: Plastic / Weight: 39g / Dimensions (L*W*H) : 45 * 48 * 24 (mm)

Pin assignment:

RS-232 Signal Name	RJ-45	
CTS (Clear To Send)	1	CTS
DSR (Data Set Ready)	2	DSR
RD (Receive Data)	3	RXD
SG (Signal Ground)	4	GND
SG (Signal Ground)	5	GND
TD (Transmit Data)	6	TXD
DTR (Data Terminal Ready)	7	DTR
RTS (Request To Send)	8	RTS
FG (Frame Ground)*	Shell	FG (Frame Ground)*

Connection:

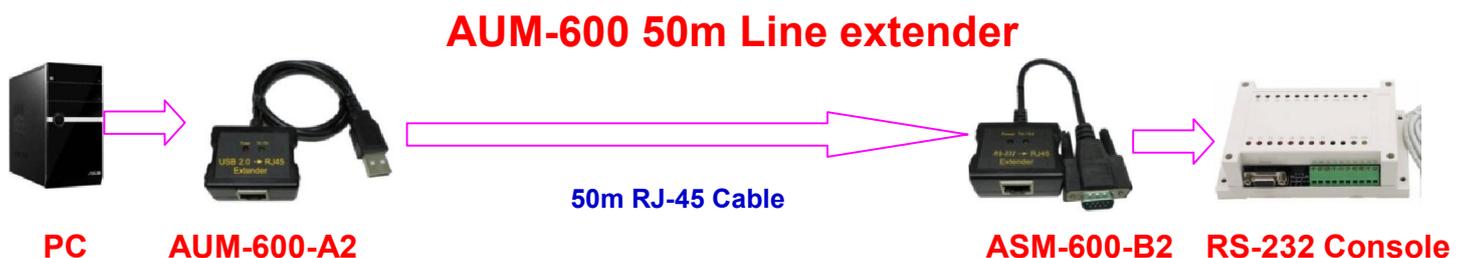

RJ-45 Cable

