


HDMI to HDMI & VGA + Audio Splitter

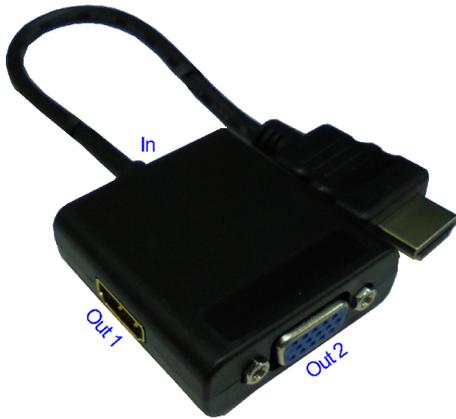

The HDMI to HDMI & VGA + Audio Splitter can convert one HDMI signal to HDMI & VGA + Audio signal sets support up to 2 different HDMI & VGA + Audio display terminals. Based on Cleared Edge technology, it supports up to 3.4Gbps data rate per channel, compliant with the HDMI 1.4 specification. This Splitter supports integrates EDID.

- HDMI 1.4 specification compliant Support 3D video formats and 4Kx2K extended resolution formats up to 3.4Gbps data rate VGA Support 1080P
- HDMI/DVI input port, up to HDMI/VGA output ports
- Unlimited cascading for more output ports or signal repeating
- Power-saving modes by source-side disablement (using output enable) as well as sink-side detection (using Hot Plug Detect)
- Multiple display/TV support
- General / ESD protection up to 3 kV
- Cable distance: 5m (In or Out) /max.
- Operating temperature: 0°C ~ +70°C
- Power free(w/ Power Jack – USB Power Cable or DC Adapter Option)
- Weight : 40g include cable. Dimension: 46 * 48 *15 (mm) +15cm Cable.
- Remark: The EDID read of Host port -----

Output port connection				EDID display
Output1	Connection	Output2	No connection	Output 1
Output1	No connection	Output2	Connection	Output 2
Output1	Connection	Output2	Connection	Output 2